




Elasto-Deck BT H2O (Waterproofing - Concrete)

Over occupied areas - 60 Mils DFT

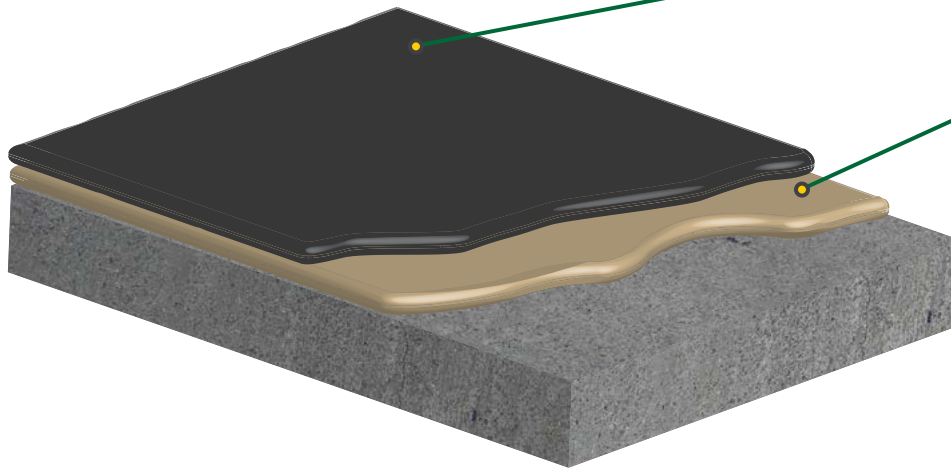

ONE COAT: 23 Sq ft per Gallon (60 Mils DFT)

- Elasto-Deck BT H2O
- While wet embed 40" Tie Tex Fabric overlapping 4"-6"

PRIMER COAT: 225-250 Sq ft per Gallon (4 Mils DFT)

- Elasto-Poxy Primer VOC or Deck-Thane Primer

DETAIL WORK: Concrete Substrate

1. V-Groove and caulk cracks, fill voids rock pockets with Permthane SM720 PU and trowel flush

DETAIL WORK: Vertical to Horizontal transitions, Inside Corners Joints, Drains etc.

1. Contact manufacture for how to address these specific conditions

Exceed 8 Hours:
Reapply Primer

Detail Work:
12-16 Hour Cure

Prime:
2-8 Hour Cure

One Coat:
48-72 Hour Cure = Protection Course and Back Fill

PRIOR

DAY 1-4



Elasto-Deck BT H2O (Waterproofing - Concrete)

Suggested Tools & Sundries



- Acetone/Xylene
- Blue Tape/Masking Tape
- Plastic Sheeting Roll
- Caulking gun
- Pool Trowel
- 1/8" Notched Trowel
- 1/8" Notched Squeegee w/ Handle
- Rubber Gloves
- Electric Drill
- Jiffy Mixing Paddle
- Screw Driver/Lid Opener
- Rags
- Chip Brush
- Push Broom
- Roller Handle with pole
- Roller Covers 3/4"-1"
- Empty Pail (Broadcast aggregate)
- Trash Bags
- Scissors