Technical Detail Drawing

# Elasto-Deck 6500 MR (Mechanical Room System)

35 Mils DFT

**TOP COAT:**
**ELASTO-DECK 6500**

4

- 100 Sq ft per gallon (15 Mils DFT)
- If a textured finish is required broadcast aggregate into the top coat 8-10 lbs per 100 Sq ft uniformly (Not to refusal) and back roll

**BASE COAT:**
**ELASTO-DECK 6500**

3

- 80 sq ft per gallon (20 Mils DFT)

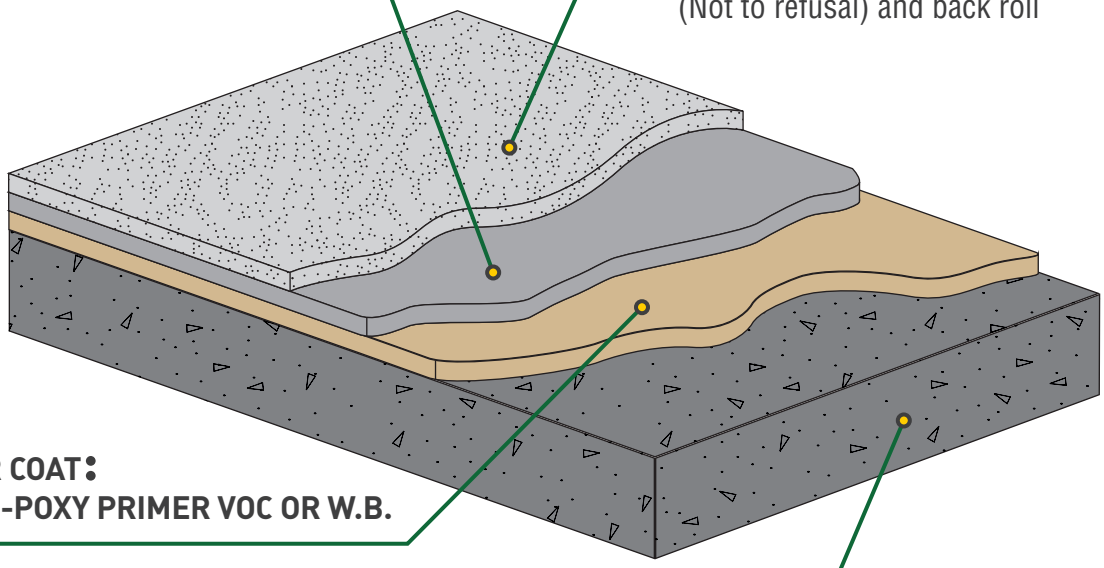

**PRIMER COAT:**
**ELASTO-POXY PRIMER VOC OR W.B.**

2

- 250 Sq ft per gallon (4 Mils DFT)

**CONCRETE SUBSTRATE**

1

(Prep surface, detail cracks, penetrations and flashing)