




# Elasto-Deck BT (Waterproofing - Plywood)

Over occupied areas - 60 Mils DFT

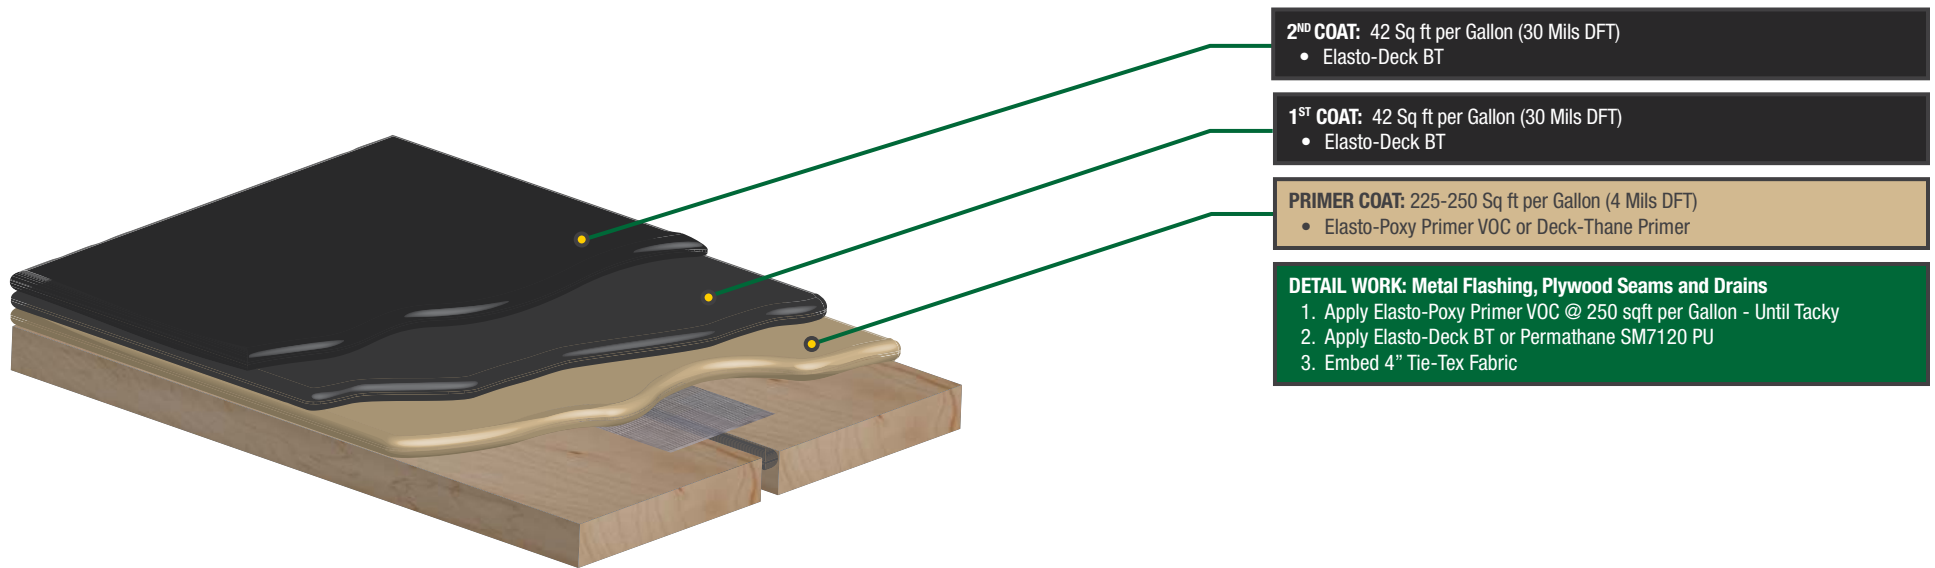


**2<sup>ND</sup> COAT:** 42 Sq ft per Gallon (30 Mils DFT)  
 • Elasto-Deck BT

**1<sup>ST</sup> COAT:** 42 Sq ft per Gallon (30 Mils DFT)  
 • Elasto-Deck BT

**PRIMER COAT:** 225-250 Sq ft per Gallon (4 Mils DFT)  
 • Elasto-Poxy Primer VOC or Deck-Thane Primer

**DETAIL WORK: Metal Flashing, Plywood Seams and Drains**

1. Apply Elasto-Poxy Primer VOC @ 250 sqft per Gallon - Until Tacky
2. Apply Elasto-Deck BT or Permathane SM7120 PU
3. Embed 4" Tie-Text Fabric

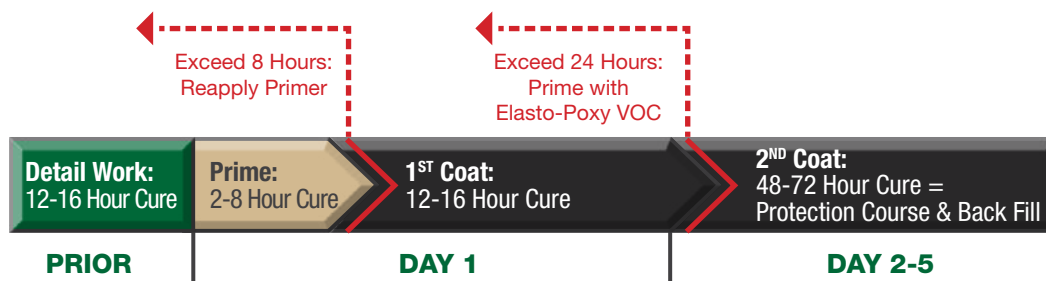



# Elasto-Deck BT (Waterproofing - Plywood)

## Suggested Tools & Sundries



- Acetone/Xylene
- Blue Tape/Masking Tape
- Plastic Sheeting Roll
- Caulking gun
- Pool Trowel
- 1/8" Notched Trowel
- 1/8" Notched Squeegee w/ Handle
- Rubber Gloves
- Electric Drill
- Jiffy Mixing Paddle
- Screw Driver/Lid Opener
- Rags
- Chip Brush
- Push Broom
- Roller Handle with pole
- Roller Covers 3/4"-1"
- Empty Pail (Broadcast aggregate)
- Trash Bags
- Scissors