





# Elasto-Deck BT DG (Waterproofing - Concrete)

Over occupied areas - 90 Mils DFT

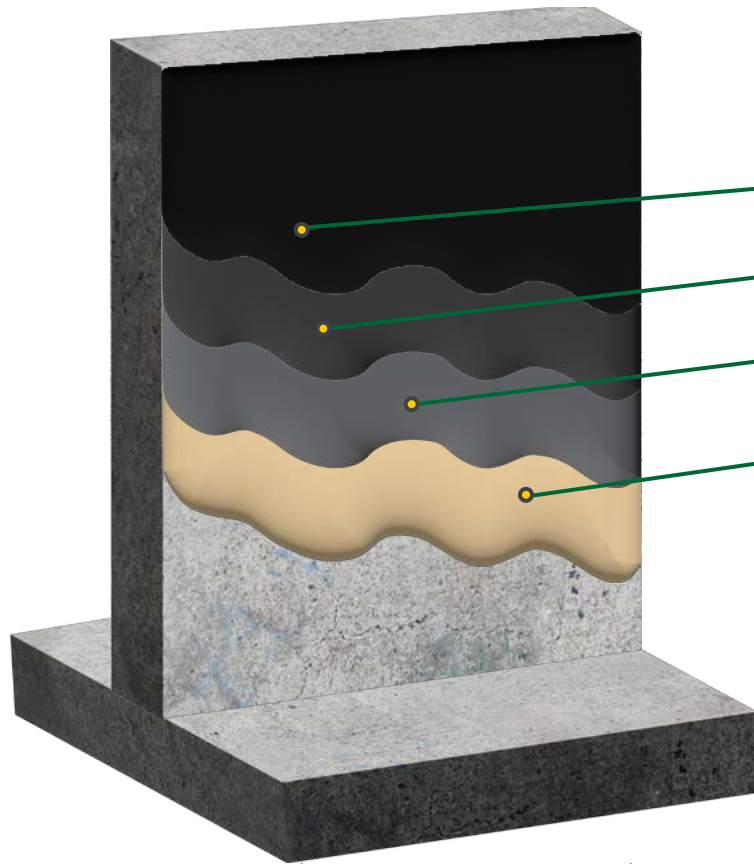


- THIRD COAT:** 42 Sq ft per Gallon (30 Mils DFT)
    - Elasto-Deck BT DG
  - SECOND COAT:** 42 Sq ft per Gallon (30 Mils DFT)
    - Elasto-Deck BT DG
  - FIRST COAT:** 42 Sq ft per Gallon (30 Mils DFT)
    - Elasto-Deck BT DG
  - PRIMER COAT:** 225-250 Sq ft per Gallon (4 Mils DFT)
    - Elasto-Poxy Primer VOC or Deck-Thane Primer
- DETAIL WORK: Concrete Substrate**
1. V-Groove and caulk cracks, caulk with Permathane SM7120 PU and trowel flush, fabric reinforce with Perma-Glas Mesh where needed
- DETAIL WORK: Vertical to Horizontal transitions, Inside Corners Joints, Drains etc.**
1. Contact manufacture for how to address these specific conditions

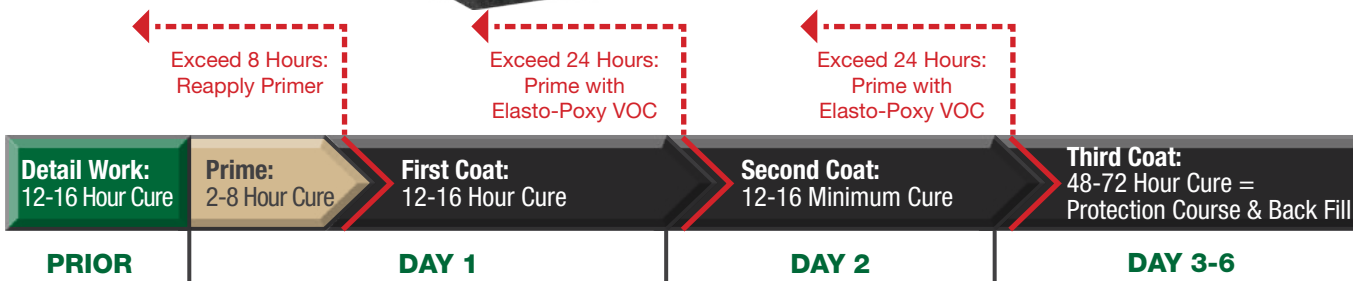



# Elasto-Deck BT DG (Waterproofing - Concrete)

## Suggested Tools & Sundries

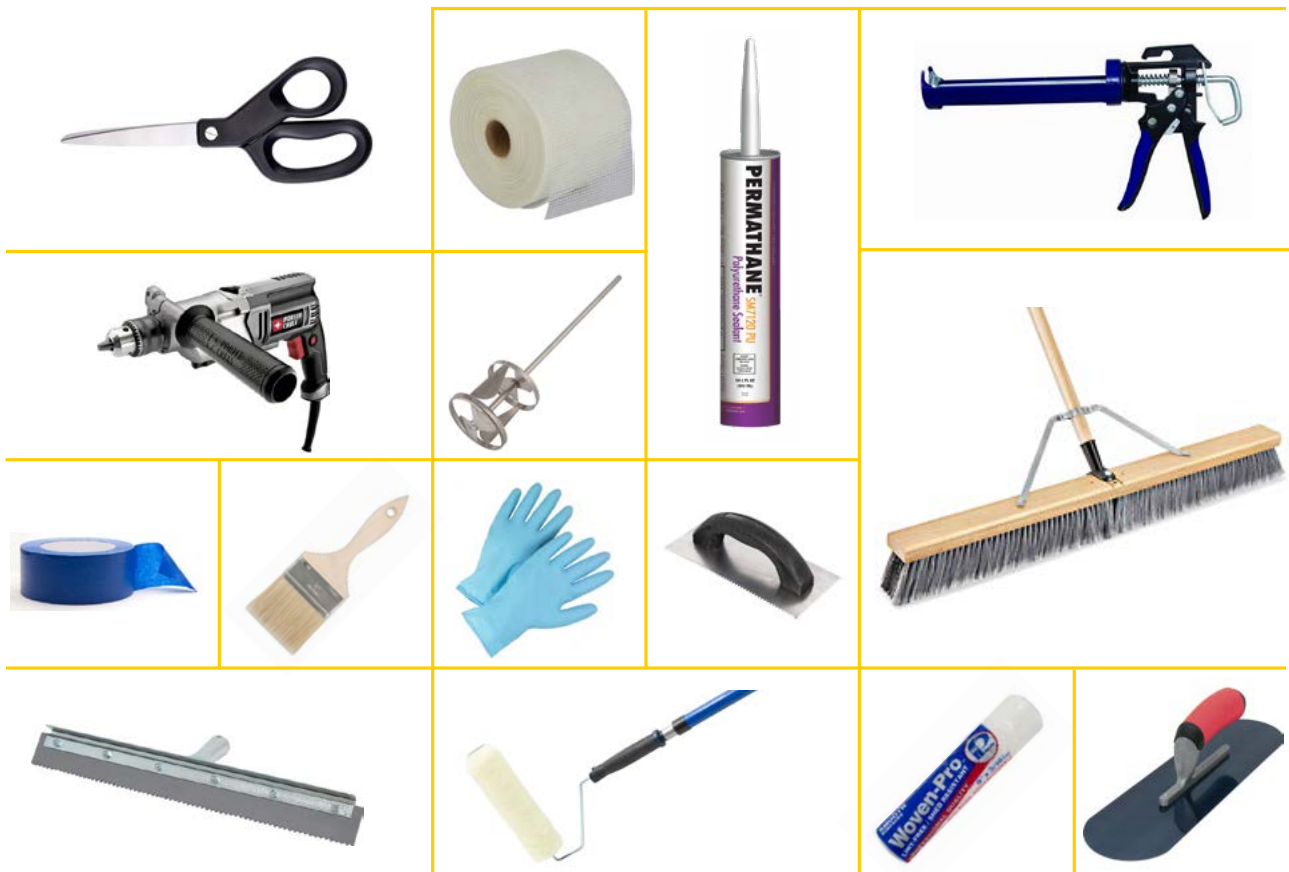

- Acetone/Xylene
- Blue Tape/Masking Tape
- Plastic Sheeting Roll
- Caulking gun
- Pool Trowel
- 1/8" Notched Trowel
- 1/8" Notched Squeegee w/ Handle
- Rubber Gloves
- Electric Drill
- Jiffy Mixing Paddle
- Screw Driver/Lid Opener
- Rags
- Chip Brush
- Push Broom
- Roller Handle with pole
- Roller Covers 3/4"-1"
- Empty Pail (Broadcast aggregate)
- Trash Bags
- Scissors