




Elasto-Deck BT H2O (Waterproofing - Plywood)

Over occupied areas - 60 Mils DFT

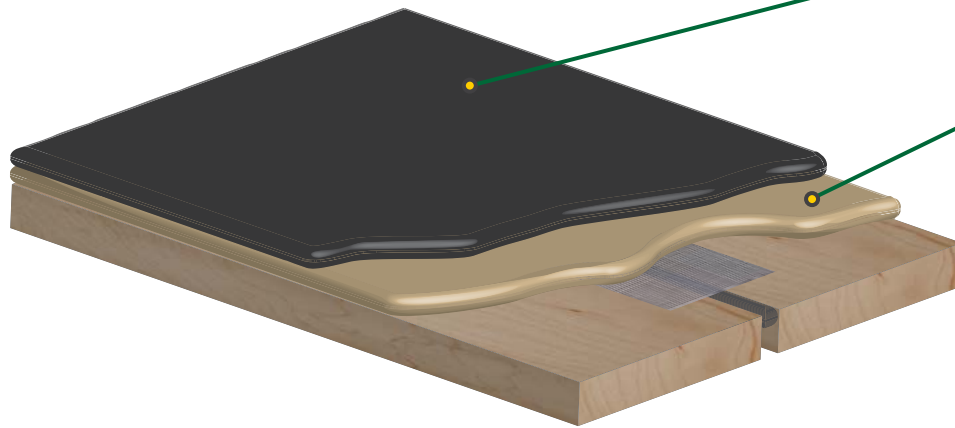


ONE COAT: 23 Sq ft per Gallon (60 Mils DFT)
• Elasto-Deck BT H2O

PRIMER COAT: 225-250 Sq ft per Gallon (4 Mils DFT)
• Elasto-Poxy Primer VOC or Deck-Thane Primer

DETAIL WORK: Concrete Substrate
1. Apply Elasto-Poxy Primer VOC @ 250 sqft per Gallon - Until Tacky
2. Apply Elasto-Deck BT or Permathane SM7120 PU
3. Embed 4" Tie-TEX Fabric

Exceed 8 Hours:
Reapply Primer



PRIOR

DAY 1-4



Elasto-Deck BT H2O (Waterproofing - Plywood)

Suggested Tools & Sundries



- Acetone/Xylene
- Blue Tape/Masking Tape
- Plastic Sheeting Roll
- Caulking gun
- Pool Trowel
- 1/8" Notched Trowel
- 1/8" Notched Squeegee w/ Handle
- Rubber Gloves
- Electric Drill
- Jiffy Mixing Paddle
- Screw Driver/Lid Opener
- Rags
- Chip Brush
- Push Broom
- Roller Handle with pole
- Roller Covers 3/4"-1"
- Empty Pail (Broadcast aggregate)
- Trash Bags
- Scissors